




GSD (China)

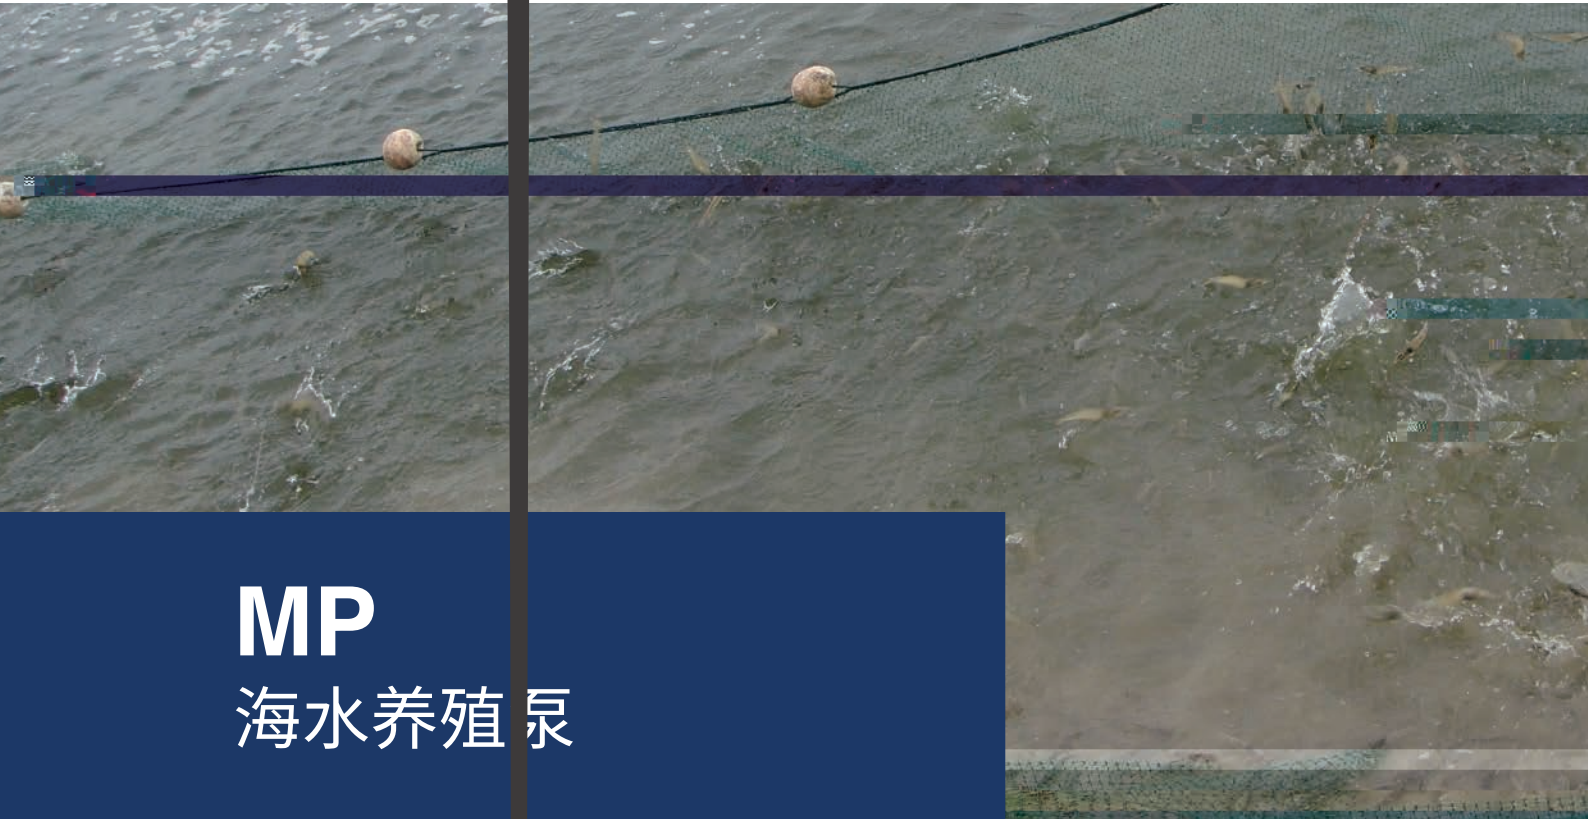

MP

海水养殖泵



MP

MP mariculture pump


Application

Fishing, irrigation, flooding excluded at low-lying areas.
Landscape Waterfall.
Water-conservancy projects.
other condition of high flow-rate.

Features


Motor is dry structure, built-in heat protector in motor, can prevent the motor from burning out; Double mechanical seal, good waterproof effect;
stalla Øst

Type description

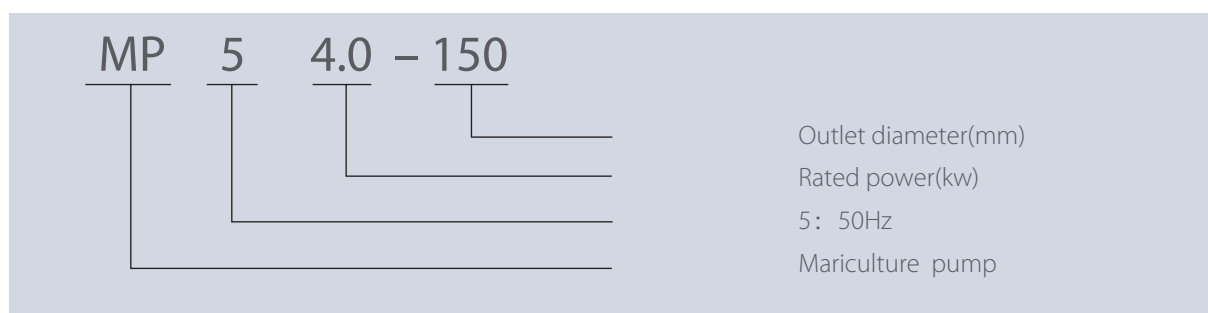


Construction

NO.	名称	Name	材质 Material	
			GB	JIS
1		Hose connector	HT200	FC200
2		Diversion outer tube gland	HT200	FC200
3		Cables	-	-
4		Motor cover	ZG07Gr19Ni10	SCS13
5		Bearing bracket above	HT200	FC200
6		Bearing	-	-
7		Motor casing	06Cr19Ni10	SUS304
8		Stator	-	-
9		Rotor	-	-
10		Shaft	20Cr13	SUS420J1
11		Bearing cover	HT200	FC200
12		Bracket	ZG07Gr19Ni10	SCS13
13		Bearing	-	-
14		Mechanical seal	C/AL ₂ O ₃	C/AL ₂ O ₃
15		Guide vane body	HT200	FC200
16		Impeller	ZG07Gr19Ni10	SCS13
17		Bottom cover	HT200	FC200
18		Strainer	HT200	FC200
19	O	O-ring	-	NBR
20	O	O-ring	-	NBR
21	O	O-ring	-	NBR
22	O	O-ring	-	NBR
23		Sealing-ring	-	LBC6

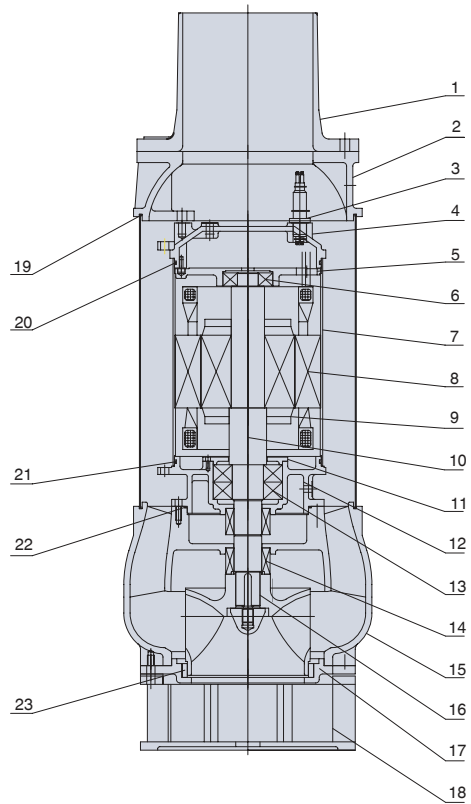


Performance chart

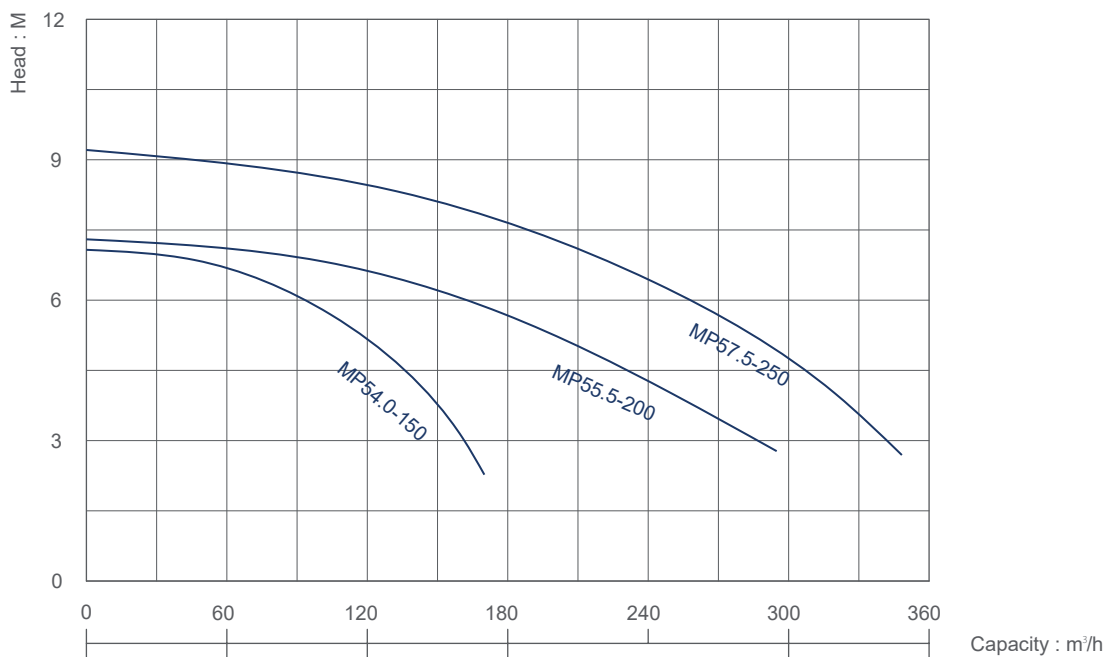

Conversion table

型号 Type	电机 Motor					泵浦 Pump				重量 Weight	外型尺寸 Overall dimension		
	功率 Power		相数 Phase	极数 Pole	频率 Eff Hz	口径 Dia.		扬程 Head m	流量 Capacity m ³ /h		mm		
	kW	hp				mm	in			A	B宽	C高	
MP54.0-150	4.0	5.5	3	4	50	150	6	3	160	102	690	286	773
MP55.5-200	5.5	7.5	3	4	50	200	8	4	250	150	770	358	864
MP57.5-250	7.5	10	3	4	50	250	10	4	320	172	813	375	1104

Installation dimensions

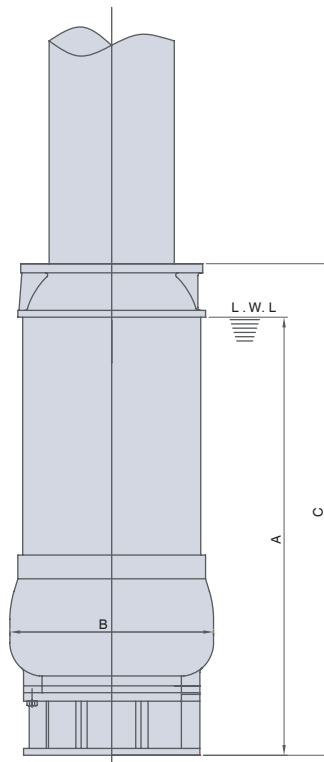

环保设备和技术服务的专业伙伴

免费咨询电话

400-657-9066

本型录内容如有变更，恕不另行通知。
We reserve the right to change content without notice.

川源(中国)机械有限公司版权所有 all rights reserved. CY-K9

